

Installing USB Drivers for OAISYS Net Server

The USB drivers are available on the OAISYS CD and the OAISYS Support web site.

CD -- \3rdParty\iButton

Web -- <http://support.oaisys.com/tools.asp>


Step 1:

Run **install_1_wire_drivers_v400.msi** (double-click to run on Windows 2000/XP/2003)



Step 2:

Uncheck the two optional components.

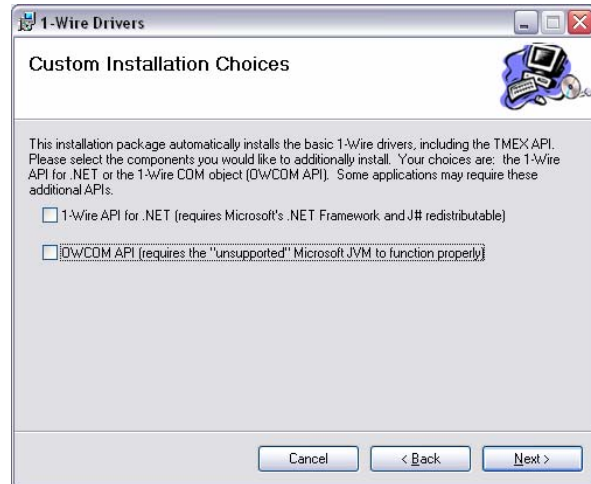

Step 3:

Unplug the USB Copy Key if it is plugged in. Select **Everyone** to make sure the driver is available to all users that log in on the PC.



Step 4:

When Setup prompts you, plug the USB Copy Key into a USB port.



Some systems may take a few moments to recognize the new USB device. Wait at least one minute before trying the Hardware Wizard.


(over)

Step 4 (Continued):

Use the Windows Found New Hardware Wizard to install the USB driver.



Select "No, not this time" and click Next.

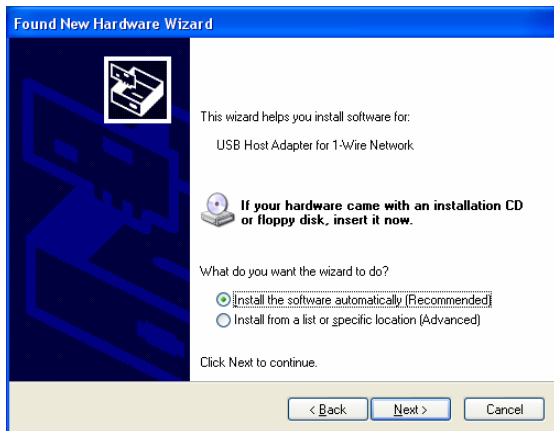


Step 6:

Restart the PC. The USB drivers will not be accessible to Net Server until you restart the system.

Note: If you move the USB Copy Key to another USB port, Windows will detect the Key as new hardware. It will automatically re-install the driver for the new USB port. Net Server will not recognize the USB Key on the new port until you restart the PC.

Step 5:

Setup runs a utility to verify the driver installation. You may safely Cancel this dialog.

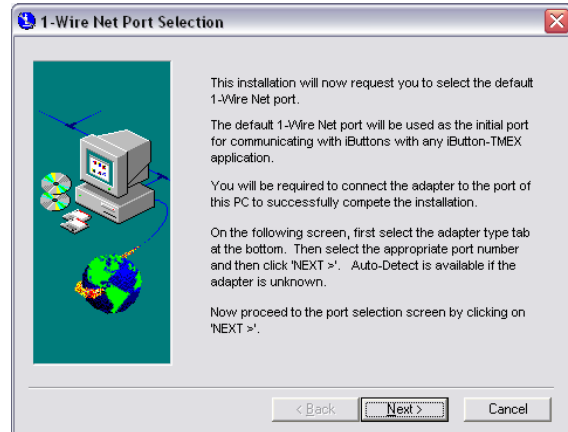

Setup will ask if you are sure. Click OK.

